


Minimum Clearances

The following illustrations show the **minimum** areas required for installing and servicing the ATM. The illustration below shows the minimum clearance dimensions for an ATM configured with a UL, or CEN, security enclosure with standard or short sleeve.

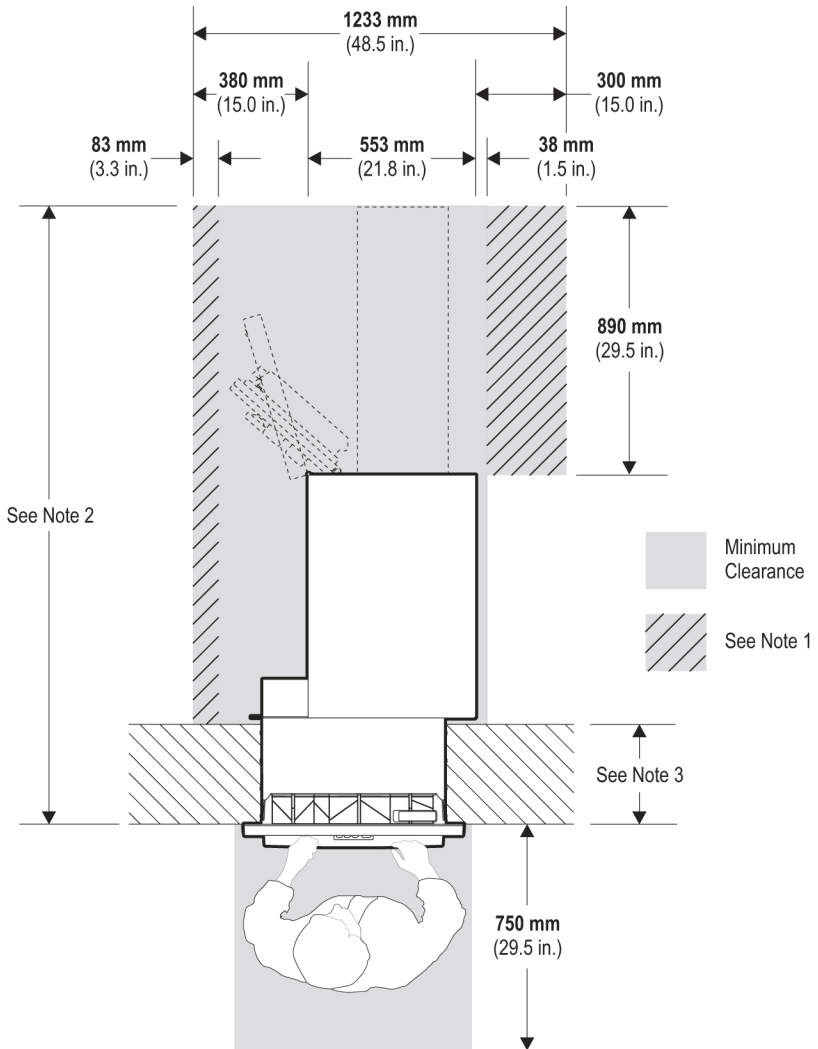

Note 1: This area is required for minimum service clearance. If this area is not available please refer to “Important Notice to Users” on page 20 and consult your local service representative.

Note 2: For standard sleeve ATMs this dimension is **2044 mm** (80.5 in.), for short sleeve ATMs this dimension is **1930 mm** (76.0 in.).

Note 3: For standard sleeve ATMs this dimension is **330 mm** (13.0 in.), for short sleeve ATMs this dimension is **203 mm** (8.0 in.).