



# Topaz Signature Pad

1. Unplug pad if plugged in.
2. Download the following programs from JPEGGER.com
  - a. Signature Pad Configuration Program
  - b. Topaz SigPlus Basic
  - c. Xlate 380 Installer
3. Install Topaz SigPlus Basic. Answer the following questions:
  - a. Will you be signing and/or viewing signatures in Microsoft Word documents and/or Excel spreadsheets? **Select: No**
  - b. Will you be signing and/or viewing signatures in Adobe Acrobat? **Select: No**
  - c. Please choose below the option that fits your needs best: **Select: I have a tablet, and want to sign eDocuments**
  - d. Please choose your tablet. **Select: LCD4X5 (T-L760 or T-L766)**
  - e. Please choose your tablet's connection type. **Select: HSB (USB type. Be sure TabletModel ends in –HSB)**
4. Install Xlate 380. Create a directory for installation i.e. C:\Program Files\xlate380
5. Configure Xlate380
  - a. Add device and select the following settings.

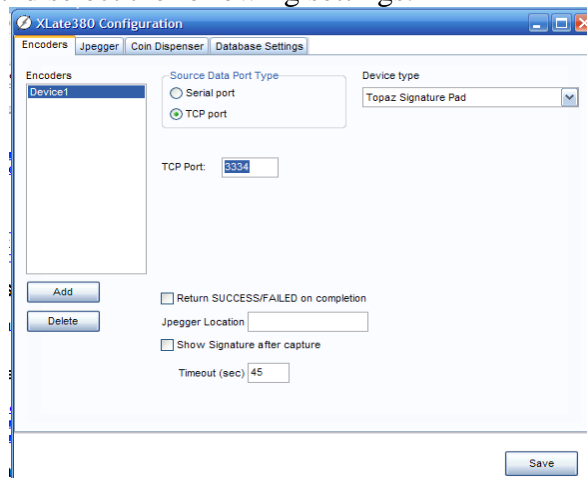


- b. Under the Jpegger tab include the following settings.

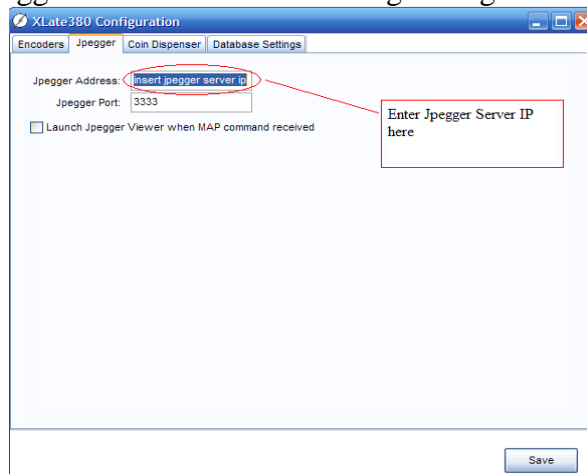


- c. Save settings.
6. Install Signature Pad Configuration Program (SigConfig.sfx.exe). Create a directory for installation i.e. C:\Program Files\sigpad

7. Run sigconfig.exe and configure
  - a. Settings under Jpegger Sites tab:

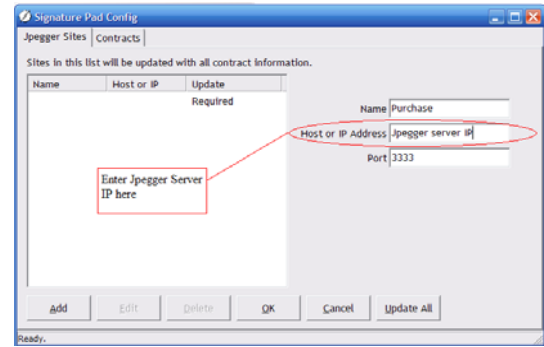

- b. Settings under Contracts tab:

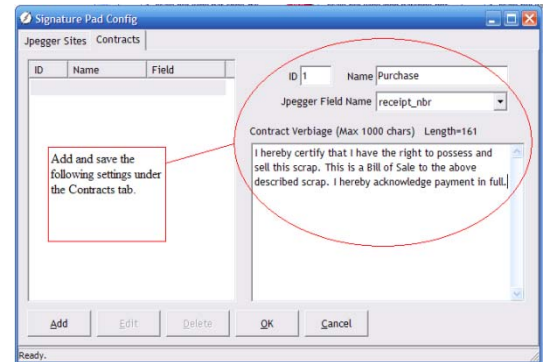

- c. Under the Jpegger Sites tab. Click “Update All”.
8. In Scrap Dragon, Back Office, Maintenance, Setup, Local Options, Peripherals
  - a. Check signature pad
  - b. IP address is the computer where the pad is attached, usually 127.0.0.1
  - c. Port is the same port # assigned to the sig pad in Xlate 380, usually 3334

